
PART NUMBER 03-460-256

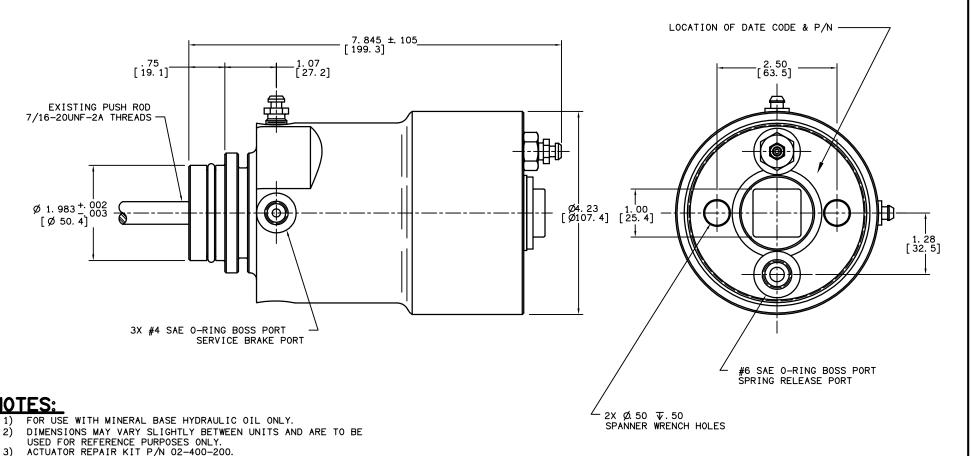

PERFORMANCE CHARACTERISTICS:

SERVICE APPLY

EFFECTIVE AREA: . 920 SQIN

STROKE: . 50 IN.

VOLUME REQUIRED AT FULL STROKE: . 460 CUIN

MAX. INLET PRESSURE: 1700 PSI

SPRING APPLY

LOAD WHEN PISTON IS RETRACTED: 1240 LB PRESSURE REQUIRED TO RETRACT SPRING FULLY: 157 PSI VOLUME REQUIRED TO RETRACT SPRING: 3.93 CUIN @ .500 TRAVEL.

MAX. SYSTEM PRESSURE: 3000 PSI

INCH [millimeter]

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. | COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED



BRAKE ACTUATOR CHECKED PART NUMBER SCALE REV 1/2 SH 03-460-256 J APP ENG DRN JJH 4-5-01 CUSTOMER COPY