


NOTES:

- 1) TO BE USED WITH FLUID COMPATIBLE WITH NITRILE SEALS.
- 2) RATED SUPPLY PRESSURE IS 3500 PSI (240 BAR).
- 3) RATED TANK PRESSURE IS 1015 PSI (70 BAR).
- 4) AC PORT IS SAE 12 (1 1/16-12) PER SAE J1926.
- 5) PORTS P AND DR ARE SAE 8 (3/4-16) PER SAE J1926.
- 6) PK, DF, LS, SB, GAC, GSB, GDF, GPK, PKS, AND ACS ARE SAE 6 (9/16-18) PER SAE J1926.
- 7) CHARGE RATE IS 1.25±.25 GPM AT 360 PSI (25 BAR) LOAD SENSE DIFFERENTIAL.
- 8) SOLENOID VALVES ARE FOR 24 VOLT AUTOMOTIVE SYSTEM.
- 9) ALL COILS ARE 8 OHM AT 77 °F (25 °C).
- 10) SWITCHES ARE NASON XM SERIES.
- 11) SOLENOID VALVE MAX LEAKAGE IS 32 ML/MIN AT 2000 PSI (138 BAR) AND 32 CST.
- 12) SHIM KIT P/N 06-400-301.
- 13) COIL REPLACEMENT KIT P/N 07-400-007.
- 14) WEIGHT IS APPROXIMATELY 19.6 LB (8.9 KG).
- 15) SURFACE COATING: 1E2731F CAT BLACK PRIMER.

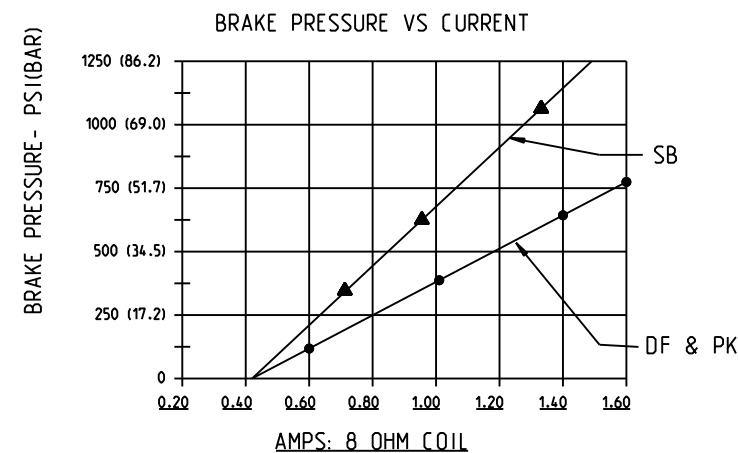

INCH
(MILLIMETER)
US PAT 6802330

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

MICO North Mankato, Minnesota USA	
SCALE 0.500	TITLE EBV-X-4S99D-D024-RN-21
DWN SEYS 2012-11-20	APVD PROD ENGR
X NO 07-1401	APVD ENGR STR 2012-12-04
SIZE B	DRAWING NUMBER 07-100-094
	REV D
	CUSTOMER COPY