-6B-1.000 PARALLEL SPLINE 4. 518 45° 4. 498 (TYP.) 22. 5° (TYP.) 4. 518 4. 498

1/2-13UNC-2B X . 625-MIN. FULL THREAD DEPTH (4.188 DIA. B.C., REF.) (8) PLACES



1.) LINING REPAIR KIT P/N 12-501-004

2.) BEARING REPAIR KIT P/N 12-501-006

O-RING REPAIR KIT P/N 12-501-002

4.) SPRING REPAIR KIT P/N 12-501-008

SPECIFICATIONS:

TYPE: DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

7 - .565 DIA. THRU 1.000 DIA. SPOTFACE (6.375 DIA. B.C., REF.)

(4) PLACES

TORQUE RATING: 9,800 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE


RELEASE PRESSURE: 210 PSI INITIAL, 290 PSI FULL

MAXIMUM OPERATING PRESSURE:

3,000 PSI

MAXIMUM SPEED: 3,900 RPM APPROXIMATE WEIGHT: 40 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

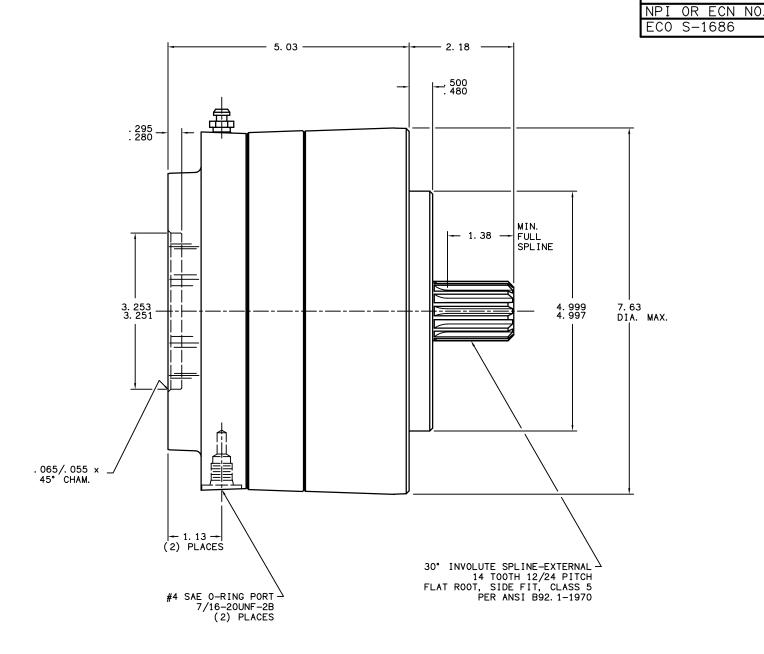

North Mankato, Minnesota U.S.A.

PART NUMBER 13-547-190

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

MULTIPLE DISC BRAKE 3C-140698-M

CHECKED PART NUMBER REV G. J. 03/07/03 1: 2 13-547-190 DRN G. J. APP ENC 3/12/98 GAA 03/06/03

Ε