

PART NUMBER 13-547-246

NPI OR ECN NO. ECO S-1686

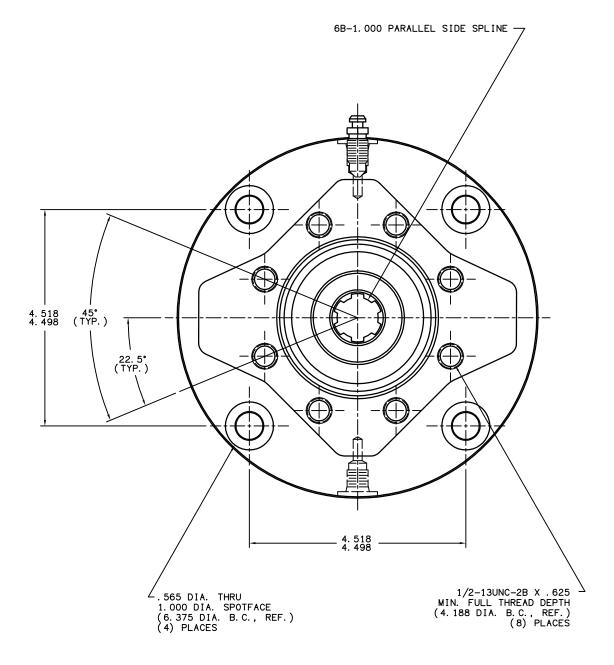

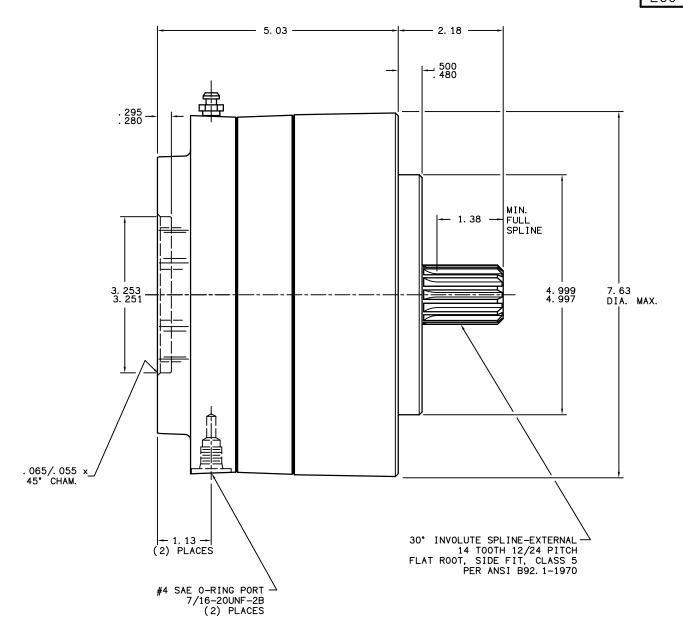

NOTES:

- 1.) LINING REPAIR KIT P/N 12-501-014
- 2.) BEARING REPAIR KIT P/N 12-501-006
- 3.) O-RING REPAIR KIT P/N 12-501-002
- 4.) SPRING REPAIR KIT P/N 12-501-008

SPECIFICATIONS:

DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE TYPE:

TORQUE RATING: 8,500 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE

RELEASE PRESSURE: 160 PSI INITIAL, 220 PSI FULL

MAXIMUM OPERATING PRESSURE:

3,000 PSI

MAXIMUM SPEED: 3,900 RPM APPROXIMATE WEIGHT: 40 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC. CLAIMS PROPRIETARY RIGHTS TO INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

THE MATERIAL DISCLOSED IN THIS DOCUMENT THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED COPYRIGHT MICO, INC. ALL RIGHTS RESERVED. North Mankato, Minnesota U.S.A.

MULTIPLE DISC BRAKE 3C-140685-M

CHECKED PART NUMBER REV G. J. 03/07/03 1: 2 D 13-547-246 DRN DMM APP ENG 7/1/99 GAA 03/06/03 GAA 03/06/03 CUSTOMER COPY