

PART NUMBER 13-547-344 NPI OR ECN NO

ECO S-1686

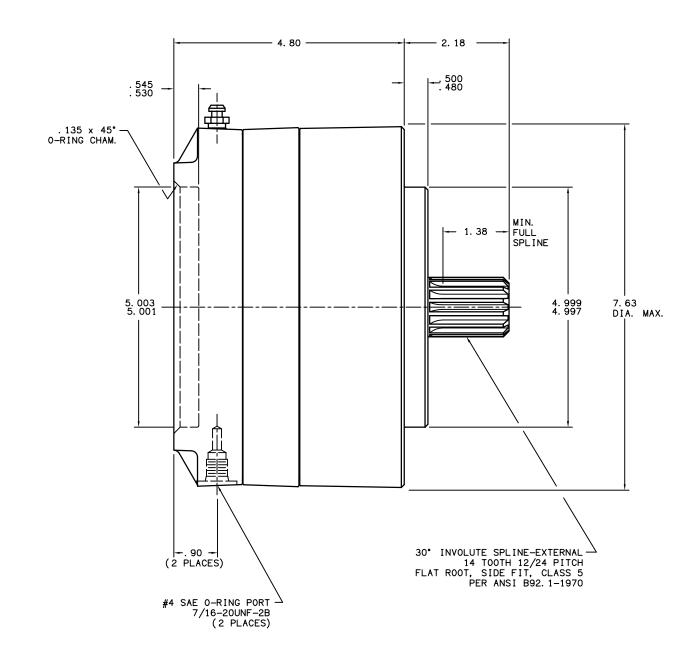

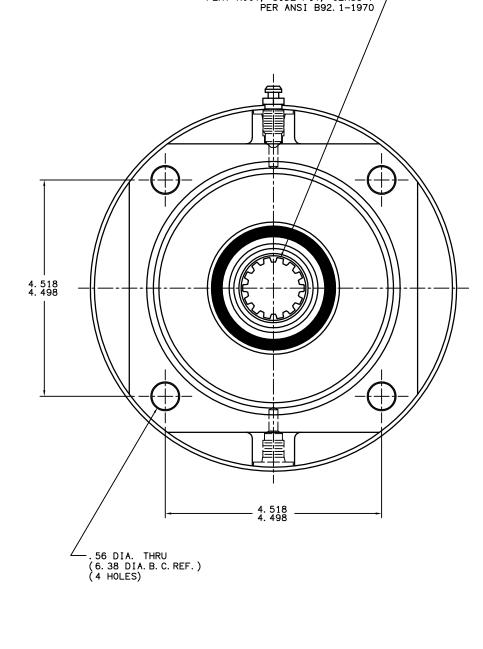

30° INVOLUTE SPLINE-INTERNAL — 14 TOOTH 12/24 PITCH FLAT ROOT, SIDE FIT, CLASS 7

NOTES:

1.) LINING REPAIR KIT P/N 12-501-004

2.) BEARING REPAIR KIT P/N 12-501-182

3.) 0-RING REPAIR KIT P/N 12-501-002

4.) SPRING REPAIR KIT P/N 12-501-008

SPECIFICATIONS:

TYPE: DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 5,500 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE

RELEASE PRESSURE: 130 PSI INITIAL, 170 PSI FULL

MAXIMUM OPERATING

PRESSURE: 3,000 PSI MAXIMUM SPEED: 3,900 RPM

APPROXIMATE WEIGHT: 40 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC. CLAIMS PROPRIETARY RIGHTS TO INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

THE MATERIAL DISCLOSED IN THIS DOCUMENT THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED COPYRIGHT MICO, INC. ALL RIGHTS RESERVED. North Mankato, Minnesota U.S.A.

MULTIPLE DISC BRAKE 3C-141455-CD

CHECKED PART NUMBER REV G. J. 03/07/03 1: 2 DRN G. J. APP ENC 10/5/98 GAA 03/06/03

Ε 13-547-344 CUSTOMER COPY