
PART NUMBER 13-547-376




.312 WIDE KEYWAY

x 1.50 LONG

1. 249 1. 247 4. 999 7. 63 1. 247 4. 997 DIA. MAX.

DIA.

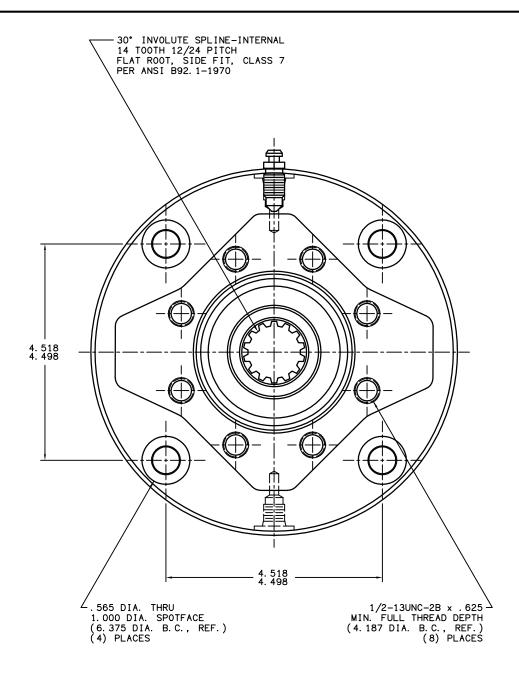

NOTES:

1.) LINING REPAIR KIT P/N 12-501-014

2.) BEARING REPAIR KIT P/N 12-501-006

3.) 0-RING REPAIR KIT P/N 12-501-002

4.) SPRING REPAIR KIT P/N 12-501-008

SPECIFICATIONS:

TYPE: DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 10,000 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE

RELEASE PRESSURE: 180 PSI INITIAL, 250 PSI FULL

MAXIMUM OPERATING

PRESSURE: 3,000 PSI 3,900 RPM MAXIMUM SPEED:

APPROXIMATE WEIGHT: 40 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

鶬 1. 13 -(2 PLACES) #4 SAE O-RING PORT 7/16-20UNF-2B (2) PLACES

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC. CLAIMS PROPRIETARY RIGHTS TO INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

. 295 . 280

3. 253 3. 251

THE MATERIAL DISCLOSED IN THIS DOCUMENT THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

- 2. 18

500 480

North Mankato, Minnesota U.S.A.

MULTIPLE DISC BRAKE 3C-251410-M

CHECKED PART NUMBER REV G. J. 03/07/03 1: 2 13-547-376 DRN G. J. APP ENC 10/6/98 GAA 03/06/03