
PART NUMBER 13-547-442 NPI OR ECN NO. ECO S-1686

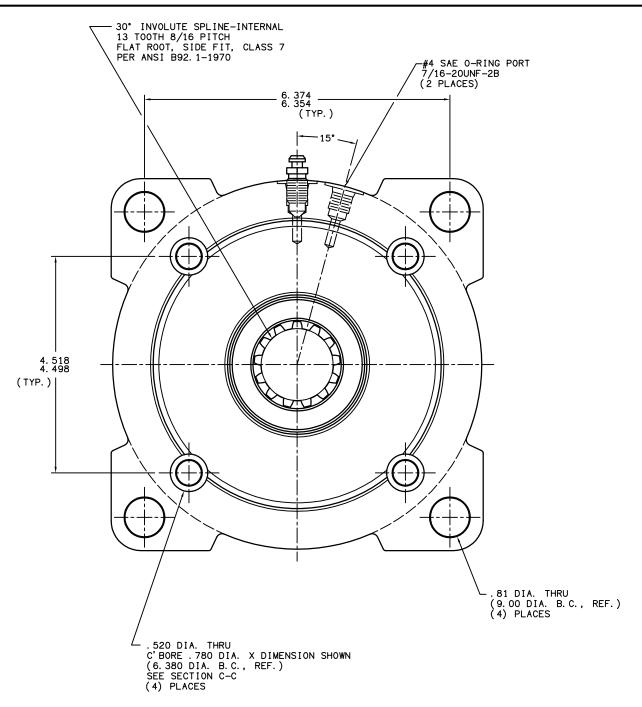

NOTES:

- 1.) LINING REPAIR KIT P/N 12-501-222
- 2.) BEARING REPAIR KIT P/N 12-501-220
- 3.) O-RING REPAIR KIT P/N 12-501-219
- 4.) SPRING REPAIR KIT P/N 12-501-221

SPECIFICATIONS:

TYPE: DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 7,000 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE

RELEASE PRESSURE: 160 PSI INITIAL, 210 PSI FULL

MAXIMUM OPERATING

PRESSURE: 3,000 PSI 3,900 RPM MAXIMUM SPEED: SINTERED BRONZE LINING MATERIAL:

APPROXIMATE WEIGHT: 50 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

4. 92

· 1. 02 -

— 2. 18 –

--- 1.38 --

30° INVOLUTE SPLINE-EXTERNAL -14 TOOTH 12/24 PITCH FLAT ROOT, SIDE FIT, CLASS 5

PER ANSI B92. 1-1970

FULL SPLINE

4. 999 4. 997

500 480

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED North Mankato, Minnesota U.S.A.

MULTIPLE DISC BRAKE 3C-141370-D

CHECKED PART NUMBER REV 1: 2 13-547-442 DRN DLV APP ENG GAA 03/06/03 11-11-96 CUSTOMER COPY

Form No. 89-500-276 11-JUL-2002