

NOTES:

1) 0-RING REPAIR KIT P/N 12-501-249

2) BEARING REPAIR KIT P/N 12-501-250

3) SPRING REPAIR KIT P/N 12-501-251

4) LINING REPAIR KIT P/N 12-501-306

SPECIFICATIONS:

DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE TYPE:

2,500 LB-IN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE TORQUE RATING:

RELEASE PRESSURE: 40 PSI INITIAL, 60 PSI FULL


MAXIMUM OPERATING

PRESSURE: 3,000 PSI

MAXIMUM SPEED: 3,900 RPM LINING MATERIAL: SINTERED BRONZE

APPROXIMATE WEIGHT: 52 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.

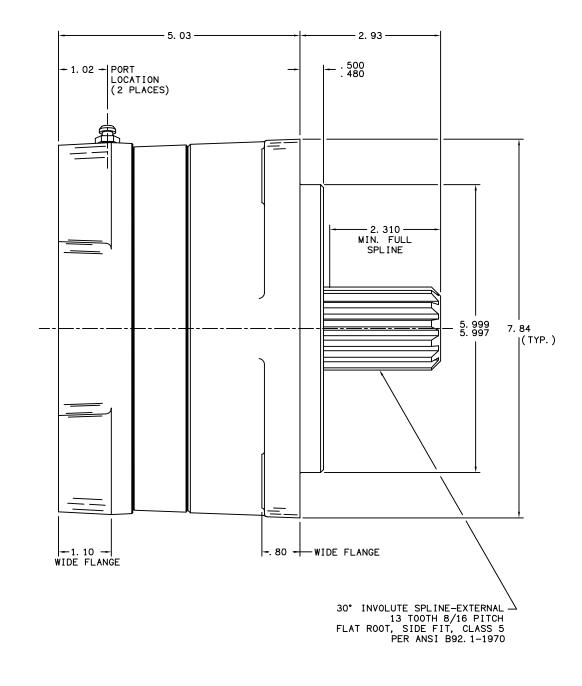



COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC CLAIMS PROPRIETARY RIGHTS TO INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL THE MATERIAL DISCLOSED IN THIS DOCUMENT. USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF AND MAY NOT BE REPRODUCED OR DISCLOSED COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO, INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

THIS DOCUMENT IS PROVIDED IN CONFIDENCE

SCALE TITLE MULTIPLE DISC BRAKE 3D-131325-D DWN ETM APVD PROD ENGRG SIZE DRAWING NUMBER REV 11/30/94 13-552-052 В APVD ENGRG X NO CUSTOMER COPY