

NOTES:

1. FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY
2. DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCES PURPOSES ONLY
MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES
3. LINING REPAIR KIT P/N 12-501-306

4. BEARING REPAIR KIT P/N 12-501-250 5. O-RING REPAIR KIT P/N 12-501-249 6. SPRING REPAIR KIT P/N 12-501-251

SPECIFICATIONS:


DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 16.000 LBIN STATIC (BREAKAWAY) AT O PSI BACK PRESSURE

RELEASE PRESSURE: 210 PSI INITIAL. 300 PSI FULL

MAXIMUM OPERATING PRESSURE: 3.000 PSI MAXIMUM SPEED: 3.900 RPM LINING MATERIAL: SINTERED BRONZE

APPROXIMATE WEIGHT: 50 LB

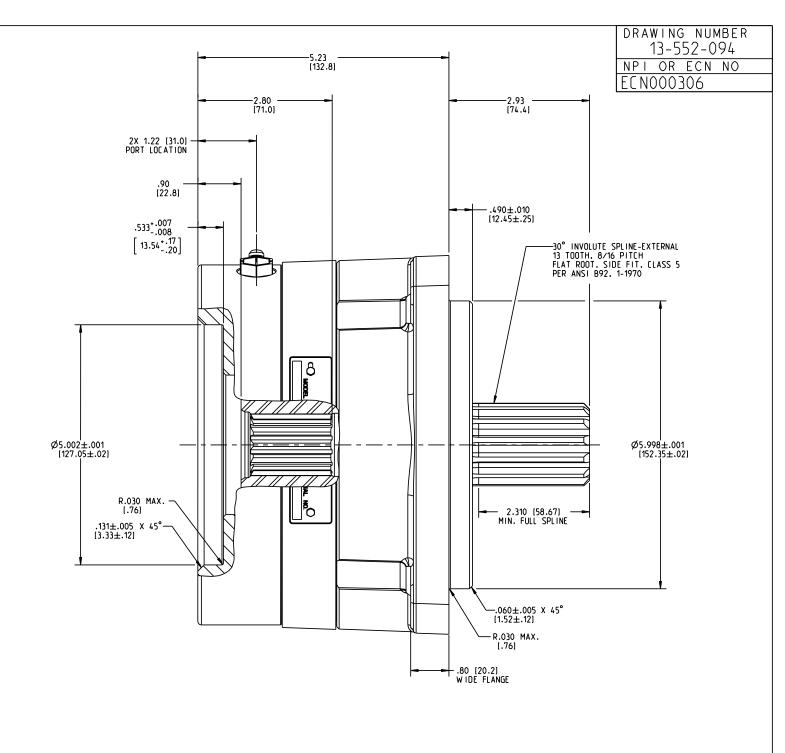

INCH [MILLIMETER]



COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC CLAIMS PROPRIETARY RIGHTS TO INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL | THE MATERIAL DISCLOSED IN THIS DOCUMENT USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR THIS DOCUMENT IS PROVIDED IN CONFIDENCE DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF AND MAY NOT BE REPRODUCED OR DISCLOSE COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO, INC AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. | COPYRIGHT MICO, INC. ALL RIGHTS RESERVED

| | • | | | | | |
|----------|------------|---------------------|------|------------|--------|-----|
| 7.0 | SCALE | TITLE 3D-131416-C | | | | |
| TO T. | 0.500 | MULTIPLE DISC BRAKE | | | | |
| CE | DWN RGBS1 | APVD PROD ENGRG | SIZE | DRAWING | NUMBER | REV |
| ED | 2010-07-27 | PJS 2010-08-18 | | 13 553 | 007 | _ |
| C. | X NO | APVD ENGRG | В | 13-552-094 | | |
| D. | X7964 | RV 2010-08-05 | | CUSTOME | R COPY | 2 2 |