


NOTES:

- FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY
- DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCE PURPOSES ONLY
MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES
- REPAIR KIT P/N 12-501-453
- O-RING REPAIR KIT P/N 12-501-490

SPECIFICATIONS:

TYPE:	WET 'C' MOUNT HYDRAULIC APPLY, SPRING RELEASE CLUTCH
TORQUE RATING:	10,000 LBIN AT 330 PSI INPUT PRESSURE
MAXIMUM INPUT PRESSURE:	350 PSI
FLUID DISPLACEMENT:	1.0 IN ³ MIN. & 1.8 IN ³ MAX.
MAX SPEED (CLUTCH ENGAGED):	3000 RPM
MAX SPEED (CLUTCH DISENGAGED):	3000 RPM
APPROXIMATE WEIGHT:	55 LB

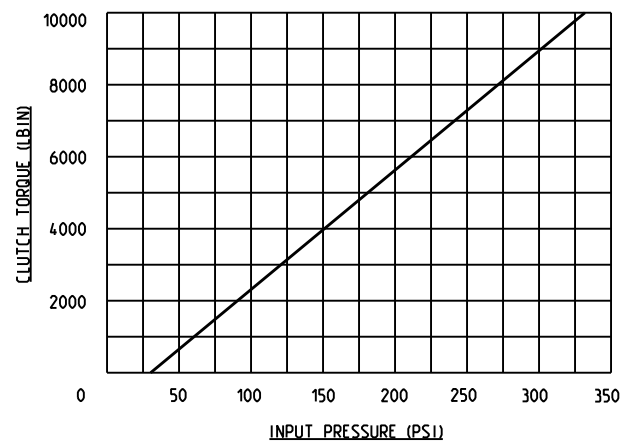

COOLING OIL RECOMMENDATIONS

OIL TYPE: MINERAL BASE HYDRAULIC
OIL SUCH AS MOBIL DTE 24,
CITGO A/W 32 OR EQUIVALENT

FLOW THRU CAPACITY: 1.0 - 5.0 GPM

MAXIMUM CASE PRESSURE: 7 PSI

SUMP OIL VOLUME:
HORIZONTAL SHAFT: 3 FL. OZ.
VERTICAL SHAFT: CONTACT FACTORY

INCH
(MILLIMETER)



North Mankato, Minnesota USA

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

SCALE 0.500	TITLE C-MOUNT CLUTCH	SIZE B	DRAWING NUMBER 13-565-034	REV D
DWN RGBSI 2010-06-02	APVD PROD ENGRG PJS 2010-08-16			
X NO X6757-60	APVD ENGRG RV 2010-07-15		CUSTOMER COPY	2 1