

PART NUMBER AND DATE CODE STAMPED ON COVER IN THIS APPROXIMATE AREA


5X 1/2-20UNF-3A GRADE 8 STUDS ON A Ø4.500 B.C. AS SHOWN. [114.30]

- NOTES:**
- FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.
  - DIMENSIONS MAY VARY SLIGHTLY BETWEEN UNITS AND ARE FOR REFERENCES PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
  - REPAIR KIT P/N 12-501-451

**SPECIFICATIONS:**

TYPE:	WET MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE
TORQUE RATING:	2,500 LBIN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE
RELEASE PRESSURE:	240 PSI INITIAL, 280 PSI FULL
MAXIMUM OPERATING PRESSURE:	3,000 PSI
MAXIMUM SPEED:	200 RPM
LINING MATERIAL:	NON-METALLIC BASED
APPROXIMATE WEIGHT:	27 LB.

MICO RECOMMENDS USING A MINIMUM OF (4) 1/2-13UNC GRADE 5 MOUNTING BOLTS TORQUED TO 55-60 LBFT.

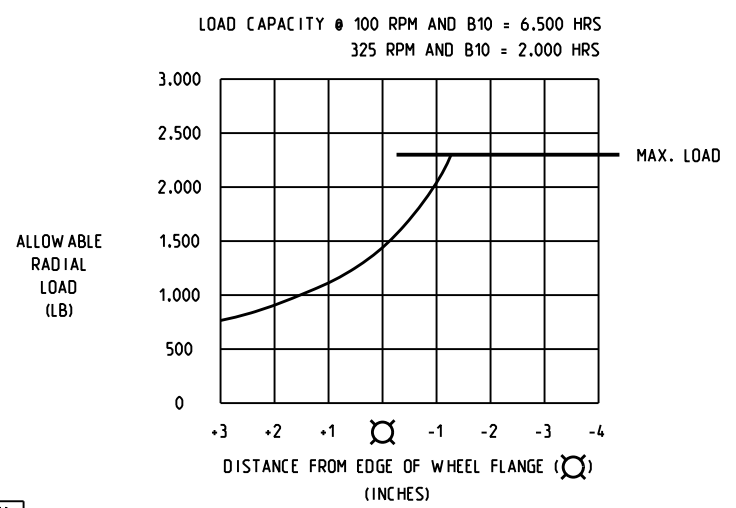

INCH  
[MILLIMETER]

**mico**  
North Mankato, Minnesota USA

SCALE 0.500	TITLE MW-054525-RZ COMPACT WHEEL MOUNT BRAKE CLOSED INPUT	SIZE B	DRAWING NUMBER 13-587-068	REV M
DWN RGS1 2010-02-22	APVD PROD ENGR PJS 2010-03-01			
X NO X6777	APVD ENGR RV 2010-02-22		CUSTOMER COPY	1 2

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.