


**NOTES:**

1. FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.
2. DIMENSIONS MAY VARY SLIGHTLY BETWEEN UNITS AND ARE FOR REFERENCES PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
3. REPAIR KIT P/N 12-501-430
4. FINISH: SEMI-GLOSS BLACK PAINT WITH RUST INHIBITOR.

**SPECIFICATIONS:**

TYPE:	DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE
TORQUE RATING:	3,500 LBIN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE
RELEASE PRESSURE:	300 PSI INITIAL, 340 PSI FULL
MAXIMUM OPERATING PRESSURE:	3,000 PSI
MAXIMUM SPEED:	200 RPM
LINING MATERIAL:	NON-METALLIC BASED
APPROXIMATE WEIGHT:	27 LB.

MICO RECOMMENDS USING A MINIMUM OF (4) 1/2-13UNC GRADE 5 MOUNTING BOLTS TORQUED TO 55-60 LBFT.

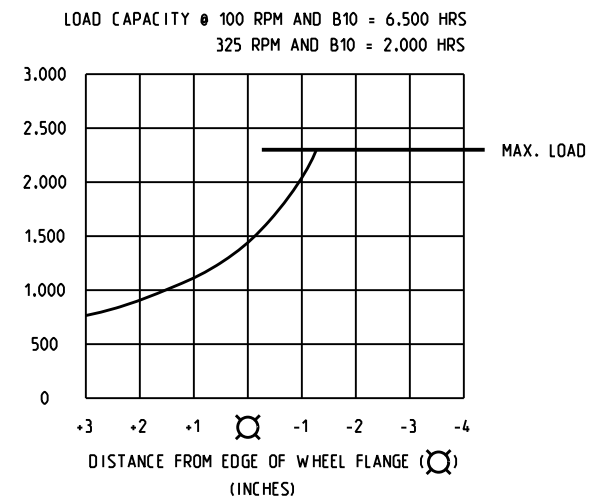

INCH  
[MILLIMETER]



COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.		MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.	
SCALE 0.500	TITLE MW-054535-R COMPACT WHEEL MOUNT BRAKE CLOSED INPUT	SIZE B	DRAWING NUMBER 13-587-074
DWN RGS1 2010-02-22	APVD PROD ENGRG PJS 2010-03-01	REV 1	REV 2
X NO	APVD ENGRG RV 2010-02-22	CUSTOMER COPY	