


NOTES:

1. FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.
2. DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCES PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
3. REPAIR KIT P/N 12-501-436
4. BRAKE SURFACE COATING: BLACK SEMI GLOSS ACRYLIC PRIMER

SPECIFICATIONS:

TYPE:	DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE
TORQUE RATING:	9,000 LBIN STATIC (BREAKAWAY) AT 0 PSI BACK PRESSURE
RELEASE PRESSURE:	385 PSI INITIAL, 460 PSI FULL
MAXIMUM OPERATING PRESSURE:	3,000 PSI
MAXIMUM SPEED:	200 RPM
LINING MATERIAL:	NON-METALLIC BASED
APPROXIMATE WEIGHT:	27 LB.

MICO RECOMMENDS USING A MINIMUM OF (4) 1/2-13UNC GRADE 5 MOUNTING BOLTS TORQUED TO 55-60 LBFT.

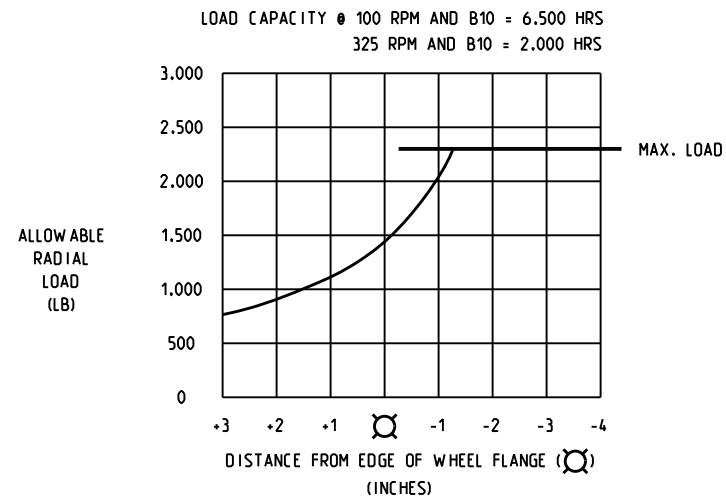

INCH
(MILLIMETER)



COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

SCALE 0.500	TITLE MW-054590-R COMPACT WHEEL MOUNT BRAKE CLOSED INPUT	SIZE B	DRAWING NUMBER 13-587-082	REV K
DWN RGS1 2011-08-02	APVD PROD ENGRG PJS 2011-12-14		CUSTOMER COPY	
X NO	APVD ENGRG BLF 2011-11-22			