

DRAWING NUMBER 21-100-024 NPI OR ECN NO ECN000131

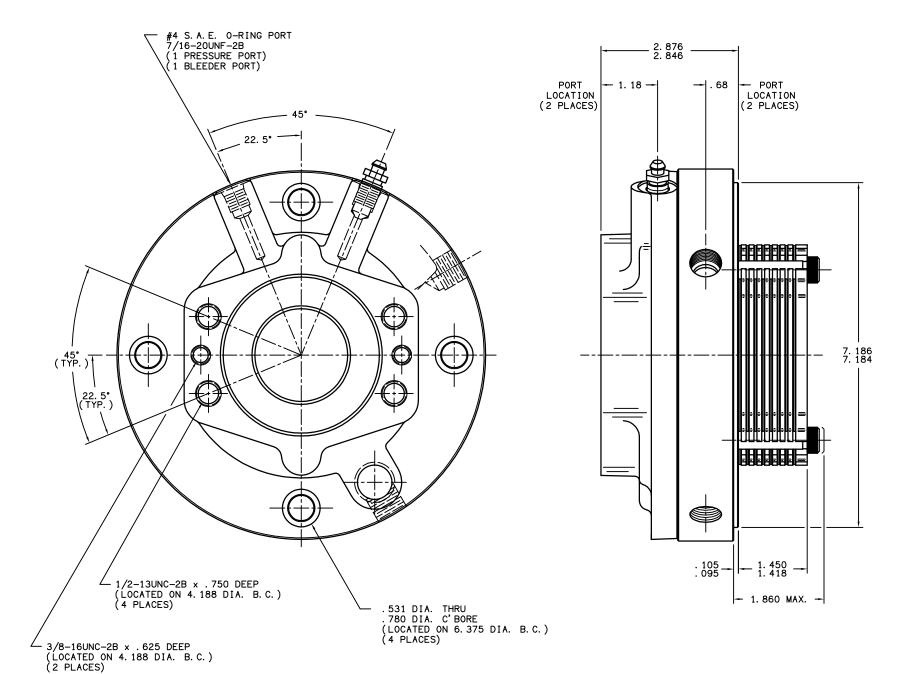

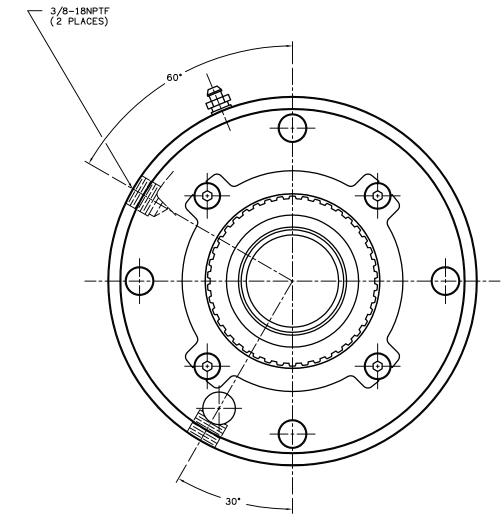

NOTES:

- 1) LINING REPAIR KIT P/N 12-501-136
- 2) 0-RING REPAIR KIT P/N 12-501-134
- 3) SPRING REPAIR KIT P/N 12-501-266
- 4) LUBRICATE ALL STATORS AND THE PRIMARY WITH A RUST-PREVENTATIVE OIL BEFORE ASSEMBLING

SPECIFICATIONS:

TYPE: WET MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE

TORQUE RATING: 3,700 IN. LBS. STATIC (BREAKAWAY) AT 0 P.S. I. BACK PRESSURE 105 P.S. I. INITIAL, 135 P.S. I. FULL

RELEASE PRESSURE: MAXIMUM OPERATING

PRESSURE:

3,000 P.S.I.

MAXIMUM SPEED: 3, 900 R. P. M.

LINING MATERIAL: SINTERED BRONZE

APPROXIMATE WEIGHT: 26 LBS.

FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, MICO, INC CLAIMS PROPRIETARY RIGHTS TO INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL THE MATERIAL DISCLOSED IN THIS DOCUMENT. USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF AND MAY NOT BE REPRODUCED OR DISCLOSED COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON WITHOUT WRITTEN PERMISSION FROM MICO. INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

THIS DOCUMENT IS PROVIDED IN CONFIDENCE

SCALE 1: 1		BRÄK	-837-Z E MODULE	
DWN kBs	APVD PROD ENGRG	SIZE	DRAWING NUMBER	REV
2-1-90	10/0 5/1000	П	21-100-024	l _B
X NO	APVD ENGRG	В	CUSTOMER COPY	