

N000603

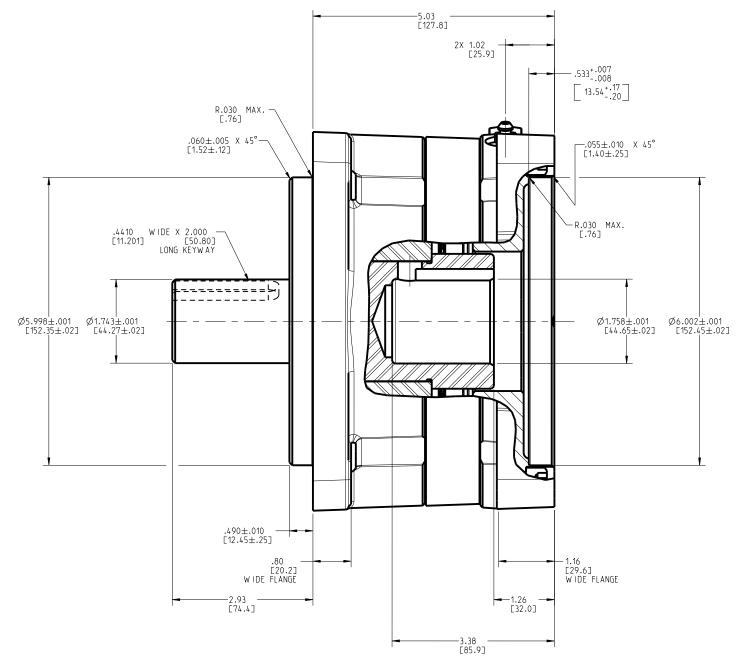

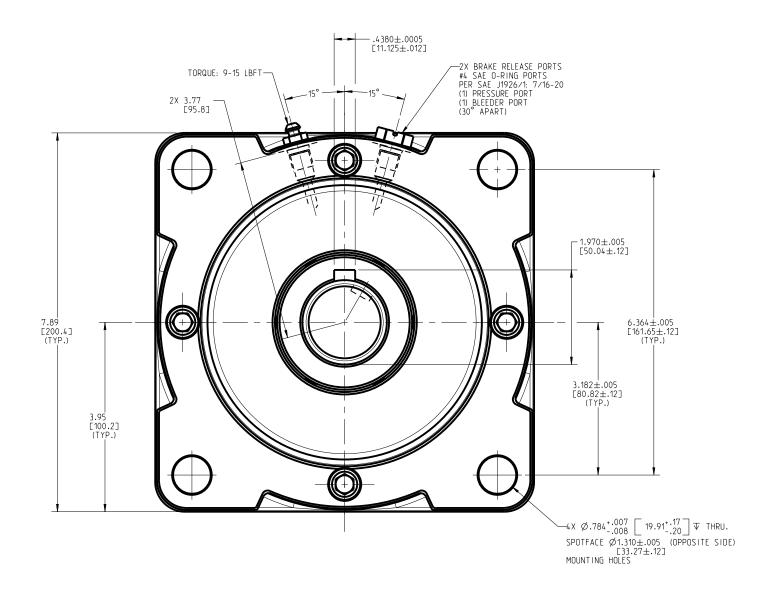

NOTES:

1. USE MINERAL BASE HYDRAULIC OIL ONLY FOR BRAKE RELEASE.
2. DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCE PURPOSES ONLY.
MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
3. LINING REPAIR KIT P/N 12-501-306
4. BEARING REPAIR KIT P/N 12-501-250
5. O-RING REPAIR KIT P/N 12-501-249
6. SPRING REPAIR KIT P/N 12-501-251

SPECIFICATIONS:

DRY MULTIPLE DISC BRAKE, SPRING APPLY, HYDRAULIC RELEASE.

TORQUE RATING: 16,000 LBIN STATIC (BREAKAWAY) AT O PSI BACK PRESSURE

RELEASE PRESSURE: 210 PSI INITIAL, 300 PSI FULL

MAXIMUM OPERATING PRESSURE: 3,000 PSI MAXIMUM SPEED: 3.900 RPM. SINTERED BRONZE LINING MATERIAL:

APPROXIMATE WEIGHT: 52 LB

INCH [MILLIMETER]



COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON | WITHOUT WRITTEN PERMISSION FROM MICO, INC. AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

·				
SCALE 0.500	TITLE 3D-757516-D MULTIPLE DISC BRAKE			
D W N SHYP0 2015-02-25	APVD PROD ENGRG PJS 2015-05-14	SIZE	DRAWING NUMBER	REV
X NO	APVD ENGRG RV 02-25-2015	В	13-552-084 CUSTOMER COPY	2 3