


DRAWING NUMBER
02-520-276
NPI OR ECN NO
ECN H000192

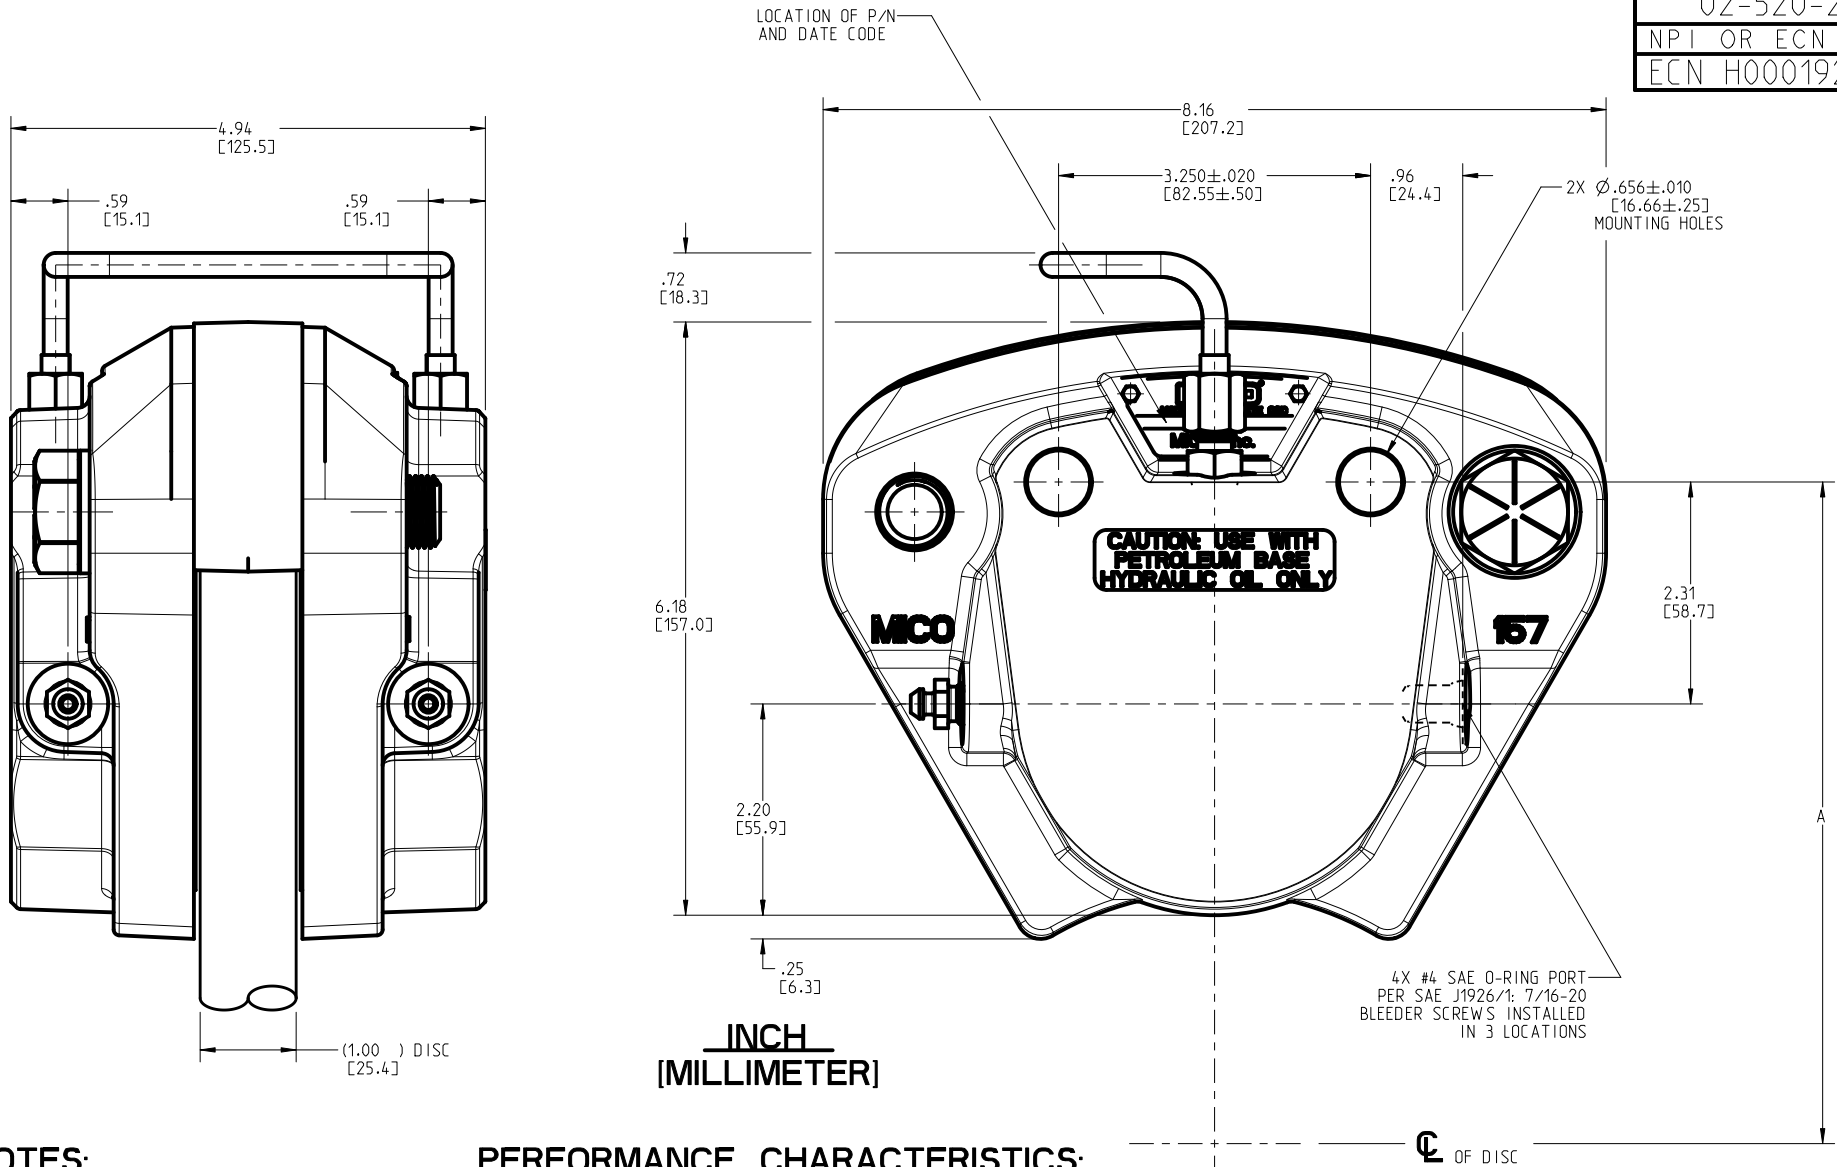

NOTES:

1. FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.
2. DIMENSIONS MAY VARY BETWEEN UNITS AND ARE FOR REFERENCE PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
3. REPAIR KIT P/N 02-500-132.
4. LINING KIT P/N 20-060-130.
5. SURFACE COATING: HIGH GLOSS BLACK PAINT.

PERFORMANCE CHARACTERISTICS:

1. DISC DIAMETER: 12.00 TO 36.00 IN.
2. DISC THICKNESS: 1.000 IN.
3. "A" DIMENSION = DISC RADIUS + .62 IN.
4. MAXIMUM INPUT PRESSURE: 2000 PSI CONTINUOUS, 2500 PSI INTERMITTENT.
5. BRAKE TORQUE: Bt (LBIN) = 6.72 X PSI X (DISC RADIUS-2.00).
6. CAUTION: DISC RUBBING SPEED SHOULD NOT EXCEED 5000 FT./MIN.

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.



SCALE 0.500	TITLE DISC BRAKE			
DWN JX 2016-08-02	APVD PROD ENGRG	SIZE A	DRAWING NUMBER 02-520-276	REV C
X NO 14-1431	APVD ENGRG BSW 2016-08-22		CUSTOMER COPY	2 2